

PI Servoamplifier G122-824

Description

The G122-824 PI Servoamplifier is used in closed loop applications where a proportional and/or integral amplifier is needed. Selector switches inside the amplifier enable proportional, integral or both to be selected. Many aspects of the amplifier's characteristics can be selected with internal switches. This enables one amplifier to be used in many different applications. The configuration options provided are the result of many years of experience in designing and commissioning closed loop systems.


The Servoamplifier employs analog electronics. It accepts three input signals, two single ended and one differential.

These are summed to produce an error signal which is then amplified proportionally and also integrated. The proportional and integral signals are switched together and output as a current or voltage to drive a servovalve.

Front panel trim pots, LED indicators and test points allow fast and easy setup and aid in trouble shooting. The servoamplifier is housed in a compact DIN rail mounting enclosure and requires a +24V supply.

Features

- P, I or P&I control
- User friendly front panel with LEDs and test points
- Two single ended inputs, one scalable
- Differential input with zero and gain
- Feedback transducer excitation output
- Optional feedback derivative term
- "In position" output
- Dither
- Enable input
- Compact DIN rail housing
- CE marked

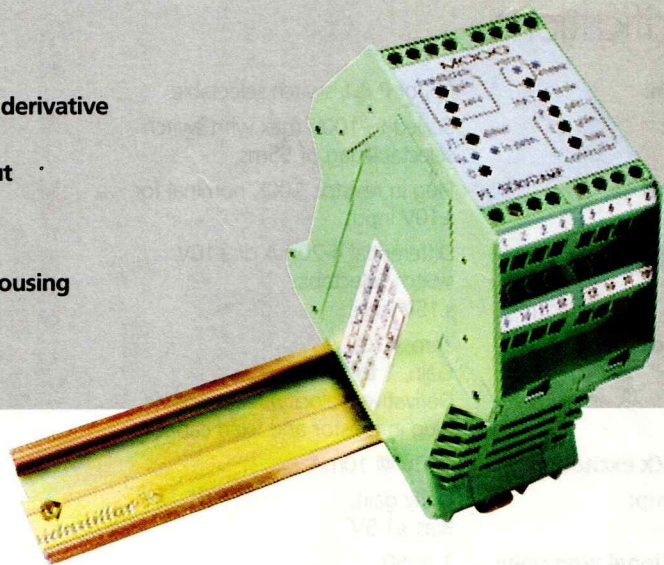

Switch selections

- Input 1 lag on or off
- Feedback input 4-20 mA or $\pm 10V$
- Proportional control, integral control or both
- Integrator input from unity gain or amplified error signal
- Integrator output divide by 10
- Output current or voltage
- Output current level
- Dither on or off

Plug-in resistors

- Input 2 = 100k for $\pm 10V$
- Feedback derivative term = not loaded
- Proportional gain range = 100k for 1 to 50 range
- Input 2 direct to output amp = not loaded


Ordering Information

PI Servoamplifier G122-824-001

Special configurations can be provided.

Consult your Moog sales office to discuss details.

Operating Details

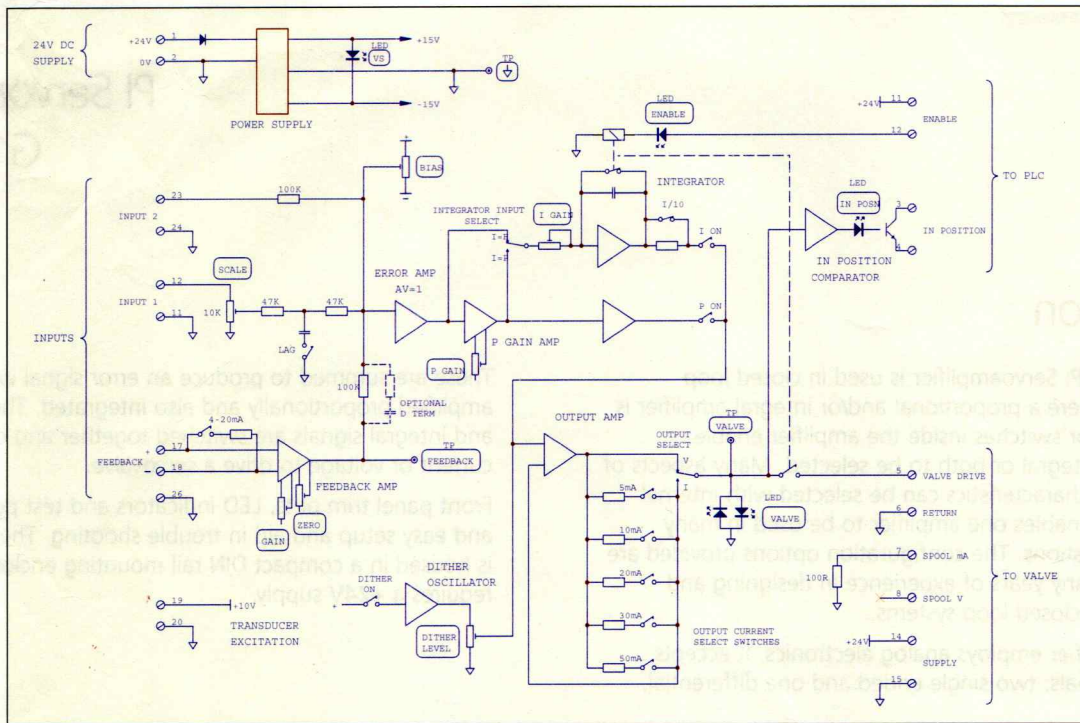

Specifications

Function:	P, I, or P & I, switch selectable
Input 1:	Scaled to 100V max with switch selectable lag of 55ms.
Input 2:	Plug in resistor, 100K nominal for $\pm 10V$ input.
Feedback input:	Differential 4-20mA or $\pm 10V$, switch selectable $\pm 15V$ max.
Feedback amp:	Zero, $\pm 10V$. Gain, 1 to 10. Derivative (velocity) feedback via plug in resistor and fixed capacitor.
Feedback excitation:	$+10V @ 10mA$.
Error amp:	Unity gain. Bias $\pm 1.5V$.
Proportional amp gain:	1 to 50.
Integrator gain:	1 to 45 per second
Integrator input:	Switch selectable from output of unity gain error amp or proportional gain amp
Enable:	Relay, $+24V @ 8mA$, 17 to 32V.
Dither:	200 Hz fixed frequency. $\pm 10\%$ valve drive Switch selectable on/off
Output amp:	Switch selectable, $\pm 10V$, $\pm 5mA$, $\pm 10mA$, $\pm 20mA$, $\pm 30mA$ and $\pm 50mA$. Maximum $\pm 100mA$ (select 20 + 30 + 50) Single ended output, return to ground

Front panel indicators:

- Vs, internal supply – green
- Valve drive – positive = red
negative = green
- Enable – yellow
- In position – green

Front panel test points: Valve $\pm 10\text{V}$ (regardless of output signal selection)
Feedback amplifier output
Signal 0V

Front panel trim pots:

- Input 1 scale
- Error amp bias
- P gain
- I gain
- Dither level
- Feedback amp gain
- Feedback amp zero

Supply: 24V nominal, 22 to 28V
50mA @ 24V, no load

Mounting: DIN rail
IP 20

Temperature: 0 to +40°C

Dimensions: 100W x 108H x 45D

Weight: 180g

CE mark: EN50081.1 emission
EN50082.2 immunity

C tick: AS4251.1 emission