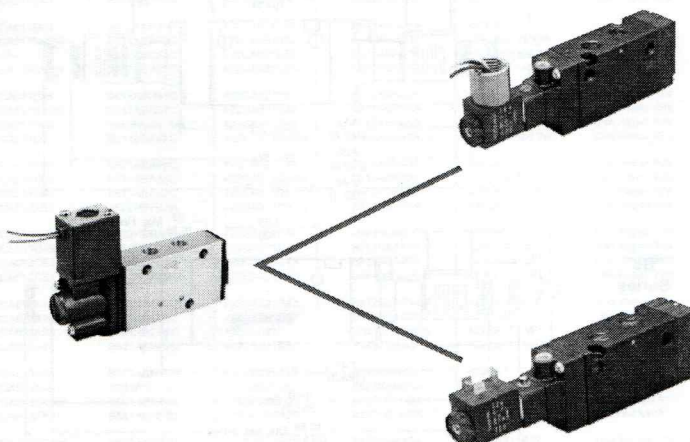





Pneumatic Division North America
Richland, Michigan 49083

VAL-SIF-112
Cross-Reference of
"42" Series to "B5/B6" Series
ISSUED: February, 2000
Supersedes: January, 2000


Cross-Reference of "42" Series → "B5/B6" Series



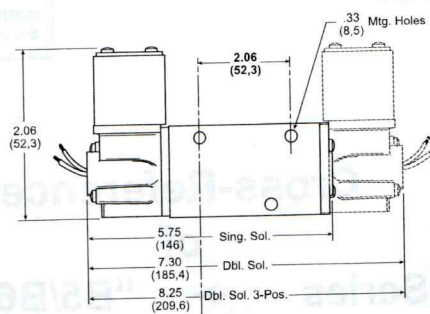
"42" Series



"B5" Series

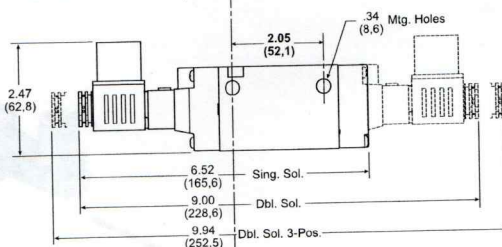

"B6" Series

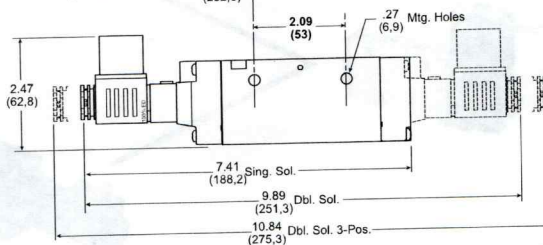

Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	B Series Number	42 Series Number	B Series Number	42 Series Number	B Series Number
422CA011A15	B521ABG45C	422CA011A45	B561ABH45C	422CA023A19	B652ABG49A
422CA011A19	B521ABG49C	422CA011A49	B561ABH49C	422CA023A23	B652ABG53A
422CA011A23W	B521ABG53C	422CA011A53	B561ABH53C	422CA023A42	B652ABH42A
422CA011A42	B521ABH42C	422CA011A57	B561ABH57C	422CA023A45	B652ABH45A
422CA011A45	B521ABH45C	422CA011A72	B561ABA42C	422CA023A49	B652ABH49A
422CA011A49	B521ABH49C	422CA011A79	B561ABA49C	422CA023A53	B652ABH53A
422CA011A49W	B521ABR49C	422CA011A83	B561ABA53C	422CA023A53W	B652ABR53A
422CA011A53	B521ABH53C	422CA011A87	B561ABA57C	422CA023A57	B652ABH57A
422CA011A53W	B521ABR53C	422CA021A23	B622ABG53A	422CA023A79	B652ABA49A
422CA011A57	B521ABH57C	422CA021A42	B622ABH42A	422CA023A83	B652ABA53A
422CA011A57W	B521ABR57C	422CA021A42W	B622ABR42A	422CA023A87	B652ABA57A
422CA011A60	Use Repair Kits	422CA021A45	B622ABH45A	422CA023C83	B652KBA53A
422CA011A62W	Use Repair Kits	422CA021A49	B622ABH49A	422CA023E53	B652ACH53A
422CA011A72	B521ABA42C	422CA021A49W	B622ABR49A	422CA024A42	B662ABH42A
422CA011A79	B521ABA49C	422CA021A53	B622ABH53A	422CA024A45	B662ABH45A
422CA011A83	B521ABA53C	422CA021A53W	B622ABR53A	422CA024A49	B662ABH49A
422CA011A87	B521ABA57C	422CA021A57	B622ABH57A	422CA024A9W	B662ABR49A
422CA011A90	Use Repair Kits	422CA021A57W	B622ABR57A	422CA024A53	B662ABH53A
422CA011B53	B5A1ABH53C	422CA021A62W	Use Repair Kits	422CA024A57	B662ABH57A
422CA011D12	B511ABG42C	422CA021A72	B622ABA42A	422CA024A79	B662ABA49A
422CA011D15	B511ABG45C	422CA021A75	B622ABA45A	422CA024A83	B662ABA53A
422CA011D19	B511ABG48C	422CA021A79	B622ABA49A	422CA024A87	B662ABA57A
422CA011D42	B511ABH42C	422CA021A83	B622ABA53A	422CA0E1A42	Use Repair Kits
422CA011D45	B511ABH45C	422CA021A87	B622ABA57A	422CA0E1A49	Use Repair Kits
422CA011D49	B511ABH49C	422CA021B49	B6A2ABH49A	422CA0E1A53	Use Repair Kits
422CA011D49W	B511ABR49C	422CA021B53	B6A2ABH53A	422CA0E1A53W	Use Repair Kits
422CA011D53	B511ABH53C	422CA021B83	B6A2ABA53A	422CA0E1A79	Use Repair Kits
422CA011D53W	B511ABR53C	422CA021C53	B622KBH53A	422CA0E1A83	Use Repair Kits
422CA011D57	B511ABH57C	422CA021D42	B612ABH42A	422CA0E1D45	Use Repair Kits
422CA011D57W	B511ABR57C	422CA021D45	B612ABH45A	422CA0E1D49	Use Repair Kits
422CA011D60	Use Repair Kits	422CA021D49	B612ABH49A	422CA0E1D53	Use Repair Kits
422CA011D72	B511ABA42C	422CA021D49W	B612ABR49A	422CA0E1D53W	Use Repair Kits
422CA011D79	B511ABA49C	422CA021D53	B612ABH53A	422CA0E1D57	Use Repair Kits
422CA011D83	B511ABA53C	422CA021D53W	B612ABR53A	422CA0E1D83	Use Repair Kits
422CA011D87	B511ABA57C	422CA021D57	B612ABH57A	422CA0E3A53	Use Repair Kits
422CA012A53	B622HBH53A	422CA021D57W	B612ABR57A	422CA0E4A53	Use Repair Kits
422CA012A53W	B622HBR53A	422CA021D60	Use Repair Kits	422CA0G1A83	Use Repair Kits
422CA012D49	B612HBH49A	422CA021D75	B612ABA45A	422CA0G1B53	Use Repair Kits
422CA012D53	B612HBH53A	422CA021D79	B612ABA49A	422CA0G1D53	Use Repair Kits
422CA012D83	B612HBA53A	422CA021D81	Use Repair Kits	422CA0G1D87	Use Repair Kits
422CA013A12	B551ABG42C	422CA021D83	B612ABA53A	422CA0G3A53	Use Repair Kits
422CA013A19	B551ABG49C	422CA021D87	B612ABA57A	422CA0J1D53	Use Repair Kits
422CA013A23	B551ABG53C	422CA021D90	Use Repair Kits	422CA111A49	B526ABH49C
422CA013A42	B551ABH42C	422CA021E53	B622ACH53A	422CA111A79	B526ABA49C
422CA013A45	B551ABH45C	422CA021L53	B622ABH53A	422CA111D79	B516ABA49C
422CA013A49	B551ABH49C	422CA021M53	B622KBH53A	422CA121A79	B627ABA49A
422CA013A49W	B551ABR49C	422CA022A49	B622HBH49A	422CA121D87	B617ABA57A
422CA013A53	B551ABH53C	422CA022A53	B622HBH53A	422CA124A79	B667ABA49A
422CA013A53W	B551ABR53C	422CA022A75	B622HBA45A	422CA411A12	Use Repair Kits
422CA013A57	B551ABH57C	422CA022A79	B622HBA49A	422CA411A19	Use Repair Kits
422CA013A72	B551ABA42C	422CA022A83	B622HBA53A	422CA411A19L	Use Repair Kits
422CA013A79	B551ABA49C	422CA022D49	B612HBH49A	422CA411A23	Use Repair Kits
422CA013A83	B551ABA53C	422CA022D53	B612HBH53A	422CA411A23L	Use Repair Kits
422CA013L83	B551ABA53C	422CA022D53W	B612HBR53A	422CA411A27	Use Repair Kits
422CA014A15W	B561ABQ45C	422CA022D79	B612HBA49A	422CA411D12	Use Repair Kits
422CA014A42	B561ABH42C	422CA022D83	B612HBA53A	422CA411D19	Use Repair Kits

Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	B Series Number	42 Series Number	B Series Number	42 Series Number	B Series Number
422CA411D19L	Use Repair Kits	422CA711D79	Use Repair Kits	422CAD21D83	Use Repair Kits
422CA411D23	Use Repair Kits	422CA711D83	Use Repair Kits	422CAD21D87	Use Repair Kits
422CA411D23L	Use Repair Kits	422CA712D79	Use Repair Kits	422CAD22A23	Use Repair Kits
422CA411D27	Use Repair Kits	422CA713A23	Use Repair Kits	422CAD22A49	Use Repair Kits
422CA411D27L	Use Repair Kits	422CA713A79	Use Repair Kits	422CAD23A53	Use Repair Kits
422CA412A23	Use Repair Kits	422CA713A83	Use Repair Kits	422CB011BXX	B541000XXC
422CA412D23	Use Repair Kits	422CA721A23	Use Repair Kits	422CB011DXX	B531000XXC
422CA413A19	Use Repair Kits	422CA721A53	Use Repair Kits	422CB012BXX	B541000XXC
422CA413A23	Use Repair Kits	422CA721A79	Use Repair Kits	422CB012DXX	B531000XXC
422CA413A23L	Use Repair Kits	422CA721A83	Use Repair Kits	422CB013BXX	B541000XXC
422CA413A83	Use Repair Kits	422CA721D19	Use Repair Kits	422CB014BXX	B541000XXC
422CA414A12	Use Repair Kits	422CA721D23	Use Repair Kits	422CB021BXX	B642000XXA
422CA414A19	Use Repair Kits	422CA721D23W	Use Repair Kits	422CB021DXX	B632000XXA
422CA414A23	Use Repair Kits	422CA721D53	Use Repair Kits	422CB022BXX	B642000XXA
422CA414A23L	Use Repair Kits	422CA721D79	Use Repair Kits	422CB022DXX	B632000XXA
422CA421A12	Use Repair Kits	422CA721D83	Use Repair Kits	422CB023BXX	B642000XXA
422CA421A15	Use Repair Kits	422CA721D87	Use Repair Kits	422CB024BXX	B642000XXA
422CA421A19	Use Repair Kits	422CA722D23	Use Repair Kits	422CB0E1BXX	Use Repair Kits
422CA421A19L	Use Repair Kits	422CA723A23	Use Repair Kits	422CB0E3BXX	Use Repair Kits
422CA421A23	Use Repair Kits	422CA723A23W	Use Repair Kits	422CB711BXX	Use Repair Kits
422CA421A23L	Use Repair Kits	422CA723A27	Use Repair Kits	422CB711DXX	Use Repair Kits
422CA421A27L	Use Repair Kits	422CA723A53	Use Repair Kits	422CB712DXX	Use Repair Kits
422CA421B23	Use Repair Kits	422CA723A79	Use Repair Kits	422CB713BXX	Use Repair Kits
422CA421B23L	Use Repair Kits	422CA723A83	Use Repair Kits	422CB714BXX	Use Repair Kits
422CA421D19	Use Repair Kits	422CA724A83	Use Repair Kits	422CB721BXX	Use Repair Kits
422CA421D19L	Use Repair Kits	422CAA11A23	Use Repair Kits	422CB721DXX	Use Repair Kits
422CA421D23	Use Repair Kits	422CAA11A79	Use Repair Kits	422CB722BXX	Use Repair Kits
422CA421D23L	Use Repair Kits	422CAA11A83	Use Repair Kits	422CB723BXX	Use Repair Kits
422CA421D27L	Use Repair Kits	422CAA11D19	Use Repair Kits	422CB724BXX	Use Repair Kits
422CA422A23	Use Repair Kits	422CAA11D23	Use Repair Kits	422CB8A21BXX	Use Repair Kits
422CA422D23	Use Repair Kits	422CAA11D53	Use Repair Kits	422CB8A21DXX	Use Repair Kits
422CA423A19	Use Repair Kits	422CAA11D83	Use Repair Kits	422CC011A83	B521KBA53C
422CA423A19L	Use Repair Kits	422CAA13A23	Use Repair Kits	422CC011B53	B5A1KBH53C
422CA423A23	Use Repair Kits	422CAA14A83	Use Repair Kits	422CC011C49	B521KBH49C
422CA423A23L	Use Repair Kits	422CAA21A83	Use Repair Kits	422CC011C53	B521KBH53C
422CA423A23W	Use Repair Kits	422CAA21D23	Use Repair Kits	422CC011C83	B521KBA53C
422CA424A12	Use Repair Kits	422CAA21D23W	Use Repair Kits	422CC011D49	B511KBH49C
422CA424A19	Use Repair Kits	422CAA21D79	Use Repair Kits	422CC011D53	B511KBH53C
422CA424A19L	Use Repair Kits	422CAA23A23	Use Repair Kits	422CC011D79	B511KB49C
422CA424A23	Use Repair Kits	422CAA23A53	Use Repair Kits	422CC011D83	B511KBA53C
422CA424A23L	Use Repair Kits	422CAA23A79	Use Repair Kits	422CC012C83	B521KBA53C
422CA424A23W	Use Repair Kits	422CAA23A83	Use Repair Kits	422CC012D83	B511KBA53C
422CA711A15	Use Repair Kits	422CAA24A27	Use Repair Kits	422CC013A53	B551KBH53C
422CA711A19	Use Repair Kits	422CAA24A53	Use Repair Kits	422CC013C83	B551KBA53C
422CA711A23	Use Repair Kits	422CAA24A79	Use Repair Kits	422CC014A53	B561KBH53C
422CA711A53	Use Repair Kits	422CAA24A83	Use Repair Kits	422CC014A83	B561KBA53C
422CA711A72	Use Repair Kits	422CAD11A53	Use Repair Kits	422CC014C53	B561KBH53C
422CA711A79	Use Repair Kits	422CAD11D27	Use Repair Kits	422CC014C83	B561KBA53C
422CA711A83	Use Repair Kits	422CAD11D53	Use Repair Kits	422CC021A53	B622KBH53A
422CA711D12	Use Repair Kits	422CAD11D79	Use Repair Kits	422CC021A79	B622KBA49A
422CA711D15	Use Repair Kits	422CAD11D83	Use Repair Kits	422CC021C53	B622KBH53A
422CA711D19	Use Repair Kits	422CAD11D87	Use Repair Kits	422CC021C83	B622KBA53A
422CA711D23	Use Repair Kits	422CAD14A79	Use Repair Kits	422CC021D42	B612KBH42A
422CA711D42	Use Repair Kits	422CAD21A23	Use Repair Kits	422CC021D49	B612KBH49A
422CA711D53	Use Repair Kits	422CAD21D49	Use Repair Kits	422CC021D53	B612KBH53A
422CA711D72	Use Repair Kits	422CAD21D53	Use Repair Kits	422CC021D72	B612KBA42A

Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	B Series Number	42 Series Number	B Series Number	42 Series Number	B Series Number
422CC021D79	B612KBA49A	422CE411E23L	Use Repair Kits	422CS711W	Use Repair Kits
422CC021D83	B612KBA53A	422CE412E23L	Use Repair Kits	422CS713W	Use Repair Kits
422CC021D87	B612KBA57A	422CE421D23	Use Repair Kits	422CS714W	Use Repair Kits
422CC022C53	B622KBH53A	422CE421D23L	Use Repair Kits	422CS721K	Use Repair Kits
422CC022D49	B612KBH49A	422CE421E23	Use Repair Kits	422CS721W	Use Repair Kits
422CC022D53	B612KBH53A	422CE421E23L	Use Repair Kits	422CS723W	Use Repair Kits
422CC022D79	B612KBA49A	422CE422E23	Use Repair Kits	422CS724W	Use Repair Kits
422CC023C49	B652KBH49A	422CE423E23	Use Repair Kits	422CSA11W	Use Repair Kits
422CC023C53	B652KBH53A	422CE423E23L	Use Repair Kits	422CSA21W	Use Repair Kits
422CC024C42	B662KBH42A	422CE711D23	Use Repair Kits	422CSA23W	Use Repair Kits
422CC024C79	B662KBA49A	422CE711D75	Use Repair Kits	422CSD11W	Use Repair Kits
422CC024C83	B662KBA53A	422CE711D79	Use Repair Kits	422CSD14W	Use Repair Kits
422CE011D45	B511ACH45C	422CE711D83	Use Repair Kits		
422CE011D49	B511ACH49C	422CE711E83	Use Repair Kits		
422CE011D53	B511ACH53C	422CE714E79	Use Repair Kits		
422CE011D53W	B511ACH53C	422CE714E83	Use Repair Kits		
422CE011D57	B511ACH57C	422CE721A83	Use Repair Kits		
422CE011D60	Use Repair Kits	422CE721D23	Use Repair Kits		
422CE011D79	B511ACA49C	422CE721D53	Use Repair Kits		
422CE011D83	B511ACA53C	422CE721D79	Use Repair Kits		
422CE011D87	B511ACA57C	422CE721D83	Use Repair Kits		
422CE011E53	B521ACH53C	422CE721E79	Use Repair Kits		
422CE011E72	B521ACA42C	422CE721E83	Use Repair Kits		
422CE011E83	B521ACA53C	422CE724E83	Use Repair Kits		
422CE012E53	B622HCH53A	422CEA11D23W	Use Repair Kits		
422CE012E83	B622HCA53A	422CEA11D75	Use Repair Kits		
422CE013E83	B551ACA53C	422CEA11D83	Use Repair Kits		
422CE014E53	B561ACH53C	422CEA11E83	Use Repair Kits		
422CE014E83	B561ACA53C	422CEA13E83	Use Repair Kits		
422CE021A53	B622ACH53A	422CED11D79	Use Repair Kits		
422CE021D49	B612ACH49A	422CED21D83	Use Repair Kits		
422CE021D49W	B612ACH49A	422CED21E83	Use Repair Kits		
422CE021D53	B612ACH53A	422CF021D53	B612KH53A		
422CE021D53W	B612ACH53A	422CF021D53W	B612KCR53A		
422CE021D57	B612ACH57A	422CF021F53	B622KH53A		
422CE021D79	B612ACA49A	422CF022F53	B622KH53A		
422CE021D83	B612ACA53A	422CF024F53	B662KH53A		
422CE021E49	B622ACH49A	422CL011A53	B521ABH53C		
422CE021E53	B622ACH53A	422CL011A57	B521ABH57C		
422CE021E57	B622ACH57A	422CL011A62	Use Repair Kits		
422CE021E79	B622ACA49A	422CL011D53	B511ABH53C		
422CE021E83	B622ACA53A	422CL011D60	Use Repair Kits		
422CE021E87	B622ACA57A	422CL011L53	B521ABH53C		
422CE022D53	B612HCH53A	422CL013L49	B551ABH49C		
422CE022E53	B622HCH53A	422CL013L79	B551ABA49C		
422CE022E83	B622HCA53A	422CL014L53	B561ABH53C		
422CE023A53	B652ACH53A	422CL021A53	B622ABH53A		
422CE023E45	B652ACH45A	422CL021A53W	B622ABR53A		
422CE023E53	B652ACH53A	422CL021D49	B612ABH49A		
422CE024E53	B662ACH53A	422CL021D53	B612ABH53A		
422CE024E79	B662ACA49A	422CL021D53W	B612ABR53A		
422CE0D1D53	Use Repair Kits	422CL024L49	B662ABH49A		
422CE0E1D53	Use Repair Kits	422CL711D83	Use Repair Kits		
422CE0E3E53	Use Repair Kits	422CS0G3W	Use Repair Kits		
422CE411D23	Use Repair Kits	422CS411W	Use Repair Kits		
422CE411D23L	Use Repair Kits	422CS711K	Use Repair Kits		

42 Series Service Kit Selection for Valves NOT Interchangeable with B5/B6

42 Series Number	Qty	Body Kit	Qty	Solenoid Kit	Qty	Pilot Kit	Qty	Override Kit	Qty	Replacement Coil
422CA011A60	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051460CP
422CA011A62W	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	N/A
422CA011A90	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058190CP
422CA011D60	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051460CP
422CA021A62W	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	N/A
422CA021D60	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051460CP
422CA021D81	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058181CP
422CA021D90	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058190CP
422CA0E1A42	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051442CP
422CA0E1A49	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051449CP
422CA0E1A53	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA0E1A53W	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071853WC
422CA0E1A79	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CA0E1A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA0E1D45	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051445CP
422CA0E1D49	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051449CP
422CA0E1D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA0E1D53W	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071853WC
422CA0E1D57	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051457CP
422CA0E1D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CA0E3A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA0E4A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA0G1A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA0G1B53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA0G1D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA0G1D57	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058187CP
422CA0G3A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA0J1D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA411A12	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071812CP
422CA411A19	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA411A19L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA411A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA411A23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071827CP
422CA411A27	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071812CP
422CA411D12	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071812CP
422CA411D19	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CA411D19L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA411D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA411D23L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071827CP
422CA411D27	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071827CP
422CA411D27L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA412A23	(1)	PS2005BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA412D23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA413A19	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA413A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA413A23L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA413A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071812CP
422CA414A12	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA414A19	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA414A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA414A23L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071812CP
422CA421A12	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071815CP
422CA421A15	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA421A19	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA421A19L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA421A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA421A23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071827CP
422CA421A27L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA421B23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA421B23L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP

Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	Qty	Body Kit	Qty	Solenoid Kit	Qty	Pilot Kit	Qty	Override Kit	Qty	Replacement Coil
422CA421D19	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CA421D19L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CA421D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA421D23L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA421D27L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071827CP
422CA422A23	(1)	PS2007BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA422D23	(1)	PS2005BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA423A19	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA423A19L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA423A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA423A23L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA423A23W	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823WC
422CA424A12	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071812CP
422CA424A19	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA424A19L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA424A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA424A23L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA424A23W	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823WC
422CA711A15	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071815CP
422CA711A19	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071819CP
422CA711A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA711A23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA711A23W	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA711A72	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058172CP
422CA711A79	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CA711A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA711D12	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071812CP
422CA711D15	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071815CP
422CA711D19	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CA711D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA711D34	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051442CP
422CA711D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA711D72	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058172CP
422CA711D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058179CP
422CA711D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CA712D79	(1)	PS2005BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058179CP
422CA713A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA713A79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CA713A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA721A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA721A53	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA721A79	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CA721A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA721D19	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CA721D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA721D23W	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823WC
422CA721D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CA721D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058179CP
422CA721D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CA721D87	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058187CP
422CA722D23	(1)	PS2005BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CA723A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CA723A23W	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823WC
422CA723A27	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071827CP
422CA723A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CA723A79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CA723A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CA724A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CAA11A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CAA11A79	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CAA11A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP

Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	Qty	Body Kit	Qty	Solenoid Kit	Qty	Pilot Kit	Qty	Override Kit	Qty	Replacement Coil
422CAA11D19	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071819CP
422CAA11D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CAA11D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CAA11D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CAA13A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CAA14A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CAA21A83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CAA21D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823CP
422CAA21D23W	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071823WC
422CAA21D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058179CP
422CAA23A23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CAA23A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CAA23A79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CAA23A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CAA24A27	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071827CP
422CAA24A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CAA24A79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CAA24A83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058183CP
422CAD11A53	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CAD11D27	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0071827CP
422CAD11D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CAD11D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058179CP
422CAD11D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CAD11D87	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058187CP
422CAD14A79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0058179CP
422CAD21A23	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CAD21D49	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051449CP
422CAD21D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0051453CP
422CAD21D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058183CP
422CAD21D87	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2036P	(1)	L0058187CP
422CAD22A23	(1)	PS2007BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0071823CP
422CAD22A49	(1)	PS2007BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051449CP
422CAD23A53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2036P	(2)	L0051453CP
422CB0E1BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB0E3BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB711BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB711DXX	(1)	PS2001BP		N/A		N/A		N/A		
422CB712DXX	(1)	PS2001BP		N/A		N/A		N/A		
422CB713BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB714BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB721BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB721DXX	(1)	PS2001BP		N/A		N/A		N/A		
422CB722BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB723BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CB724BXX	(1)	PS2009P		N/A		N/A		N/A		
422CBA21BXX	(1)	PS2003BP		N/A		N/A		N/A		
422CBA21DXX	(1)	PS2001BP		N/A		N/A		N/A		
422CE011D60	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0051460CP
422CE001D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0051453CP
422CE0E1D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0051453CP
422CE0E3E53	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0051453CP
422CE411D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE411D23L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE411E23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE412E23L	(1)	PS2007BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE421D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE421D23L	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE421E23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE421E23L	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE422E23	(1)	PS2007BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP





Cross-Reference of "42" Series to "B5/B6" Series

VAL-SIF-112

42 Series Number	Qty	Body Kit	Qty	Solenoid Kit	Qty	Pilot Kit	Qty	Override Kit	Qty	Replacement Coil
422CE423E23	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE423E23L	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0071823CP
422CE711D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE711D75	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058175CP
422CE711D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058179CP
422CE711D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058183CP
422CE711E83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CE714E79	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058179CP
422CE714E83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CE721A83	(1)	PS2003BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058183CP
422CE721D23	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823CP
422CE721D53	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0051453CP
422CE721D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058179CP
422CE721D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058183CP
422CE721E79	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058179CP
422CE721E83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CE724E83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CEA11D23W	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0071823WC
422CEA11D75	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058175CP
422CEA11D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058183CP
422CEA11E83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CEA13E83	(1)	PS2009P	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CED11D79	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058179CP
422CED21D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2035P	(1)	L0058183CP
422CED21E83	(1)	PS2003BP	(2)	PS2013BP	(2)	PS2015BP	(2)	PS2035P	(2)	L0058183CP
422CL011A62	(1)	PS2003BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2037P	(1)	N/A
422CL011D60	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2037P	(1)	L0051460CP
422CL711D83	(1)	PS2001BP	(1)	PS2013BP	(1)	PS2015BP	(1)	PS2037P	(1)	L0058183CP

Specials

422CY002	1/4" SS BLK BODY 422CA011D53 w/ Hard Anodized Body	B511ABH53C (Body is not anodized)
422CY005	3/8" DSOL VALVE 422CA021A53 w/ L0105953YB Class H 120VAC coil	B612ABH53A (Not Available with Class H Coil)
422CY012	3/8" SS CYL 120V - 422CA021D83 w/ Cyl Mount Body, Special Spool, Spring Return.	B Series is Not Available in Cylinder Mount Style
422CY013	3/8" DS 240V-H" - 422CA021A57 w/ L0105957YB Class H 240VAC coil	B612ABH57A (Not Available with Class H Coil)
422CY029	3/8" SS 2POS CYL - 422CA0E1D53 Cyl Mount w/ Special Cyl Mount Body	B Series is Not Available in Cylinder Mount Style
422CY032	3/8" 2POS SS Ext. Pilot SPECIAL 422CM021D83 w/ Prestolok Fittings in Ports 2 & 4	B612KBA53A with (2) W68PL-6-6 Prestolok Fittings
422CY033	3/8" SPECIAL 422CA023A53 w/ L0105953YB Class H 120VAC coil	B652ABH53A (Not Available with Class H Coil)
422CY036	3/8" D SOL 3POS 422CA023A57 w/ L0105957YB Class H 240VAC coil	B652ABH57A (Not Available with Class H Coil)
422CY038	3/8" D SOL 3POS 422CA023A49 w/ L0105957YB Class H 24VDC coil	B652ABH49A (Not Available with Class H Coil)

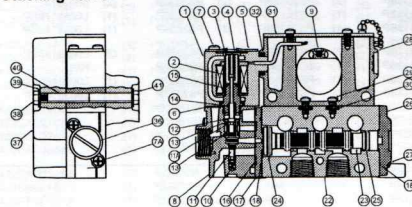"42" Series 2-Position Valve**Inline Valve****Stacking Valve****COIL SELECTION:**



Voltage / Frequency			Standard Lead Wire Type-Inline	Standard Lead Wire Type-Stacking	ISO 4400 3-Pin Connector Type
60 Hz AC	50 Hz AC	DC			
24V	22V		L0051442CP	L0071812CP	L0058172CP
		12V	L0051445CP	L0071815CP	L0058175CP
		24V	L0051449CP	L0071819CP	L0058179CP
120V	110V		L0051453CP	L0071823CP	L0058183CP
240V	220V		L0051457CP	L0071827CP	L0058187CP
		120V	L0051460CP	L0071830CP	L0058190CP

SERVICE KITS:

	Single Pressure	Dual Pressure
Single Operator Valve Body (Consisting of Items: 7A, 16, 18, 21, 23, 24, 25, 27)	PS2001BP	PS2005BP
Double Operator Valve Body (Consisting of Items: 7A, 16, 18, 21, 23, 24)	PS2003BP	PS2007BP
Solenoid Service Kit (2 Kits required for Double Solenoid) (Consisting of Items: 2, 3, 4, 6, 7, 14, 15)	PS2013BP	
Pilot Body Service Kit (2 Kits required for Double Solenoid) (Consisting of Items: 7A, 10, 11, 11A, 12, 13, 16, 18)	PS2015BP	

Item Description

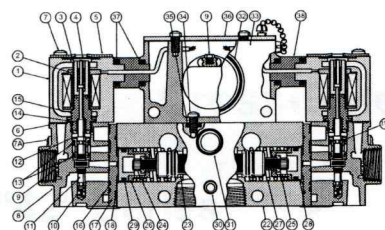- 1 Solenoid Assembly (See Chart)
- 1A Solenoid Assembly (ISO 4400)
- 2 Guide Sleeve
- 3 Plunger Assembly
- 4 Override Seal
- 5 Solenoid Top Plate
- 6 Seal (Solenoid to Pilot Body)
- 7 Screws (Metric M4 x 0.7-50 mm)
- 7A Screws (Metric M4 x 0.7-50 mm)
- 8 Pilot Body
- 9 Ground Screw
- 9A Cup Washer
- 10 Spring (Poppet Return)
- 11 Poppet Assembly
- 11A Lip Seal
- 12 Bore Insert
- 13 Seals (Bore Insert)
- 14 Plunger Pin
- 15 Fixed Pole Assembly
- 16 Seal (Pilot Body to Adaptor Plate)
- 17 Solenoid Adaptor Plate
- 18 Seal (Body End Seal)
- 19 Remote Pilot Plate
- 20 End Bumper
- 21 Screws (Metric M4 x 0.7-16 mm)
- 22 Valve Body
- 23 Spool
- 24 Seal (Spool Piston)
- 25 Seal (Spool)
- 26 End Cap (Air Return)
- 27 Screws (Metric M4 x 0.7-12 mm)
- 28 Junction Box
- 29 Screws (Metric M4 x 0.7-12 mm)
- 30 Seal (Junction Box to Body)
- 31 Top Plate Assembly
- 32 Seal (Solenoid to Junction Box)
- 33 Seal (Valve Body)
- 34 Seal (Valve Body)
- 35 Seal (Junction Box)
- 36 Electrical Plug (1/2-14 NPT)
- 37 End Plate
- 38 Screws (Metric M5 x 0.8-16 mm)
- 39 Washer
- 40 Tie Rod
- 41 Nut (Tie Rod)
- 42 Seal (End Plate/Body-Int. Pilot)
- 43 Seal (End Plate/Body-Int. Pilot)
- 44 Seal (End Plate/Body-Ext. Pilot)
- 45 Seal (End Plate/Body-Ext. Pilot)

"42" Series 3-Position Valve**SERVICE KITS:**


Valve Body Service Kit	PS2009BP
(Consisting of Items: 7A, 16, 18, 21, 23, 24, 27, 29)	
Solenoid Service Kit	PS2013BP
(2 Kits required for Double Solenoid)	
(Consisting of Items: 3, 4, 6, 7, 14, 15)	
Pilot Body Service Kit	PS2015BP
(2 Kits required for Double Solenoid)	
(Consisting of Items: 7A, 10, 11, 12, 13, 16, 18)	

Item Description

- 1 Solenoid Assembly (See Chart)
- 3 Plunger Assembly
- 4 Override Seal
- 5 Solenoid Top Plate
- 6 Seal (Solenoid/Pilot Body)
- 7 Screws (Metric M4 x 0.7-50mm)
- 7A Screws (Metric M4 x 0.7-50mm)
- 8 Pilot Body
- 9 Ground Screw
- 10 Spring (Poppet Return)
- 11 Poppet Assembly
- 12 Bore Insert
- 13 Seal (Bore Insert)
- 14 Plunger Pin
- 15 Fixed Pole Assembly
- 16 Seal (Pilot Body/Adaptor Plate)
- 17 Adaptor Plate
- 18 Seal (Body End Seal)
- 19 Remote Pilot Plate (1/8" NPT.)
- 20 End Bumper
- 21 Screws (Metric M4 x 0.7-16mm)
- 22 Valve Body
- 23 Spool
- 24 Screw (Metric MS x 0.8-20mm S.H.C.S.)
- 25 Shoulder Sleeve
- 26 Spring Retainer
- 27 Spring (Centering)
- 28 Piston
- 29 O-ring (Piston)
- 30 Seal (Valve Body)
- 31 Seal (Valve Body)
- 32 Seal (Junction Box)
- 33 Junction Box
- 34 Screws (Metric M4 x 0.7-12mm)
- 35 Seal (Junction Box to Body)
- 36 Top Plate Assembly
- 37 Seal (Spacer)
- 38 Spacer (Coil to Junction Box)

COIL SELECTION:

Voltage / Frequency			Standard Lead	Standard Lead	ISO 4400 3-Pin
60Hz AC	50Hz AC	DC	Wire Type-inline	Wire Type-Stacking	Connector Type
24V	22V		L0051442CP	L0071812CP	L0058172CP
		12V	L0051445CP	L0071815CP	L0058175CP
		24V	L0051449CP	L0071819CP	L0058179CP
120V	110V		L0051453CP	L0071823CP	L0058183CP
240V	220V		L0051457CP	L0071827CP	L0058187CP
		120V	L0051460CP	L0071830CP	L0058190CP

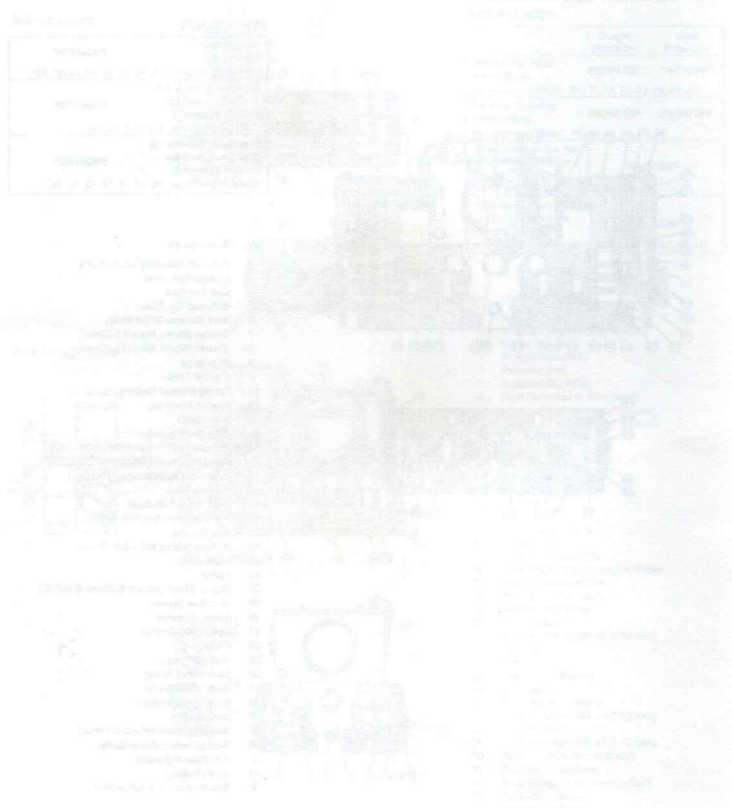

Parker Hannifin Corporation
Pneumatic Division North America
8676 E. M89
P.O. Box 901
Richland, MI 49083 USA
Tel: (616) 629-5000
Fax: (616) 629-5385

Customer/Technical Service
Tel: (616) 629-5575
Fax: (800) 648-5480
Fax: (800) 426-3259
Web site: www.parker.com/pneumatic
E-mail: PDNMKTG@parker.com

VAL-SIF-112 2/2000 7M IGS Printed in USA